

PASS/N

Electromechanical vehicular barrier for
semi-intensive use



For residential and
collective usage



Available in 24V



For booms up to 5m
in length



PASS/N

The encoder guarantees greater control and safety in movement

Easy manual opening thanks to the key release from the outside

More visibility of the boom by installing the STRIP-LED (optional)

Possibility to indicate the closing position (red LED) and the opening position (green LED). *

RAL 7016 grey steel, powder paint, textured finish.

The DE@NET universal control board make this operator compatible with NETLINK System.



Compatible with NETCOM, the device for the installation, maintenance and remote management, from your office!

*For this functionality it is necessary to purchase separately art. NET-EXPANSION or art. NET-EXPANSION MINI



Models

24V $\approx$ barriers with control board for semi-intensive use



COD.	Art.					OTHER CHARACTERISTICS
644040	PASS24NET/N/V	3 m fast	●●	NET24N	✓	- Speed adjustment during normal cycle and slow down in opening and closing - Motor control by encoder and obstacle detection - Possibility to lock the programming to prevent tampering
644042	PASS24NET/N/VR	4 m fast	●●	NET24N	✓	
644041	PASS24NET/N/L	4 and 5 m slow	●●	NET24N	✓	
644050	PASS24NET/N/V/INOX	3 m fast	●●	NET24N	✓	
644052	PASS24NET/N/VR/INOX	4 m fast	●●	NET24N	✓	
644051	PASS24NET/N/L/INOX	4 and 5 m slow	●●	NET24N	✓	

PASS24NET/N/V, PASS24NET/N/VR, PASS24NET/N/L models: painted in RAL 7016.

INOX models: AISI 304 stainless steel, RAL 7016 grey colour with cataphoresis treatment.

All models:

- led lights, boom, boom holder and foundation plate are not included.
- the barrier must be balanced correctly in order to allow a proper way of operation

ATTENTION: you must use 1 control board NET24N with every barrier.

Technical info

TECHNICAL INFO	PASS24NET/N/V	PASS24NET/N/L	PASS24NET/N/VR
Motor power supply (V)	24V $\approx$		
Maximum power absorption (W)	105		
Duty cycle (cycles/hours)	290	140	240
N. max cycles in 24h.	800		
Operating temperature (°C)	-20 ÷ 50		
90° Opening time (s)	2,2	6	2,8
Weight with packing (Kg)	41		
Sound pressure (dBA)	< 70		
Protection level	IPX4		

Scan the QR CODE to view all the content we have created on this operator






Manual release with a customised key, accessible from outside the body.

Gearmotor with **endless screw and steel gears, bronze crown**, lubricated by a **low viscosity grease** ensuring a long life and reduced wear rate.

Equipped with an **encoder** to obtain an acceleration ramp, maintaining a constant torque in the slowdown phase and detection in the event of an obstacle.

Opening and closing speeds are adjustable from 2.2 to 6 seconds.

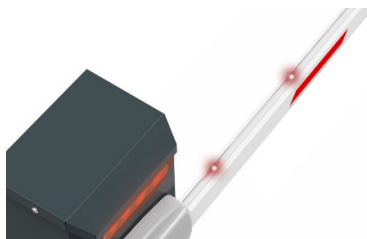

Aluminum boom, rectangular profile 65x38mm with support.





Bicolor red / green (optional) LED strip. For the functioning STOP-Red and PASSAGE-Green, provide NET-EXPANSION.








Robust frame in painted steel thickness 2mm.

Security lock supplied with 2 keys.


Example of a typical installation

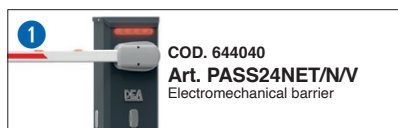


SPECIFIC ACCESSORIES

 COD. 649140 Art. PASS3 DEA rectangular painted boom 3000x65x38mm, with reflective stickers art.1012	 COD. 649141 Art. PASS4 DEA rectangular painted boom 4000x65x38mm, with reflective stickers art.1012	 COD. 381744 Art. OMPASS Boom holder for DEA booms art.PASS3 and art.PASS4
 COD. 649240 Art. PASS5 DEA painted lightweight boom 5000x80x40mm, without reflective stickers. To be used only with art. PASS24NET/N/L (not compatible with other accessories)	 COD. 649250 Art. OMPASS5 Boom holder and fixing counter-plate for DEA boom art. PASS5	 COD. 381741 Art. OMPASS60 Boom holder for commercial boom 60x30mm
Not compatible with other accessories or with the front plastic cover of the boom holder		
 COD. 649012 Art. ART-PASS Joint for folding boom (art. PASS3 and art. PASS4)	 COD. 649000 Art. 1006 Mobile boom support	 COD. 649020 Art. 1010 Height adjustable fixed boom support
 COD. 649021 Art. 1010/M Height adjustable fixed boom support with magnet	 COD. 667061 Art. LOOP 230/1 Loop detector, 1 channel	 COD. 667071 Art. LOOP 230/2 Loop detector, 2 channels
 COD. 649290 Art. LED/B LED strip for top of the barrier case Consumption: min. 184 mA - max. 552 mA. For power supply, please refer to the technical manual.	 COD. 649174 Art. STRIP-LED Led strip for booms (L=8m) without power adapter	 COD. 163523 Art. POWER SUPPLY 840mA Power supply 24V - 20W for NET-COM and LED/B (only required on NET230N)
 COD. 681034 Art. SMFLED230/2 230V led traffic light: red-green lights	 COD. 681035 Art. SMFLED24/2 24V led traffic light: red-green lights	 COD. 321810 Art. GSOFTP Black rubber profile, EPDM S65 (24m)
 COD. 649160 Art. BSF Bracket for LINEAR photocells	 COD. 649200 Art. BAT/PASS Battery set for PASS barriers consisting of 2 x 4Ah batteries, fixing plates and connecting cables	 COD. 649073 Art. PASS/B Foundation plate
 COD. 101026 Art. 1012 Reflective red stickers (1 pcs)		

Technical info

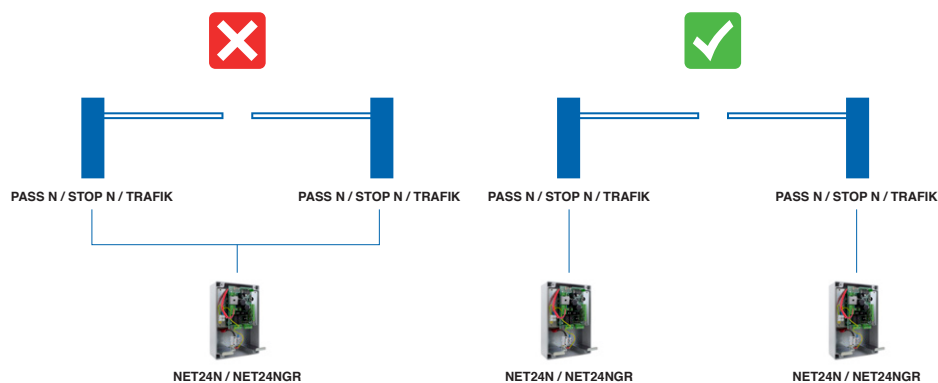


PASS 3, PASS 4, BOOM/4, BOOM/6, BOOM-LINK




Accessories

Articulated boom Art.ART-PASS

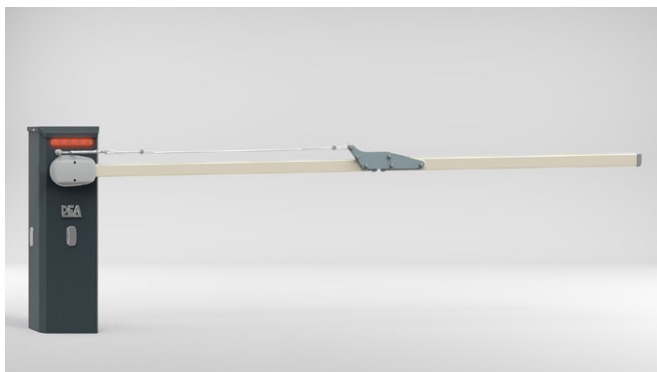


Mobile support Art.1006

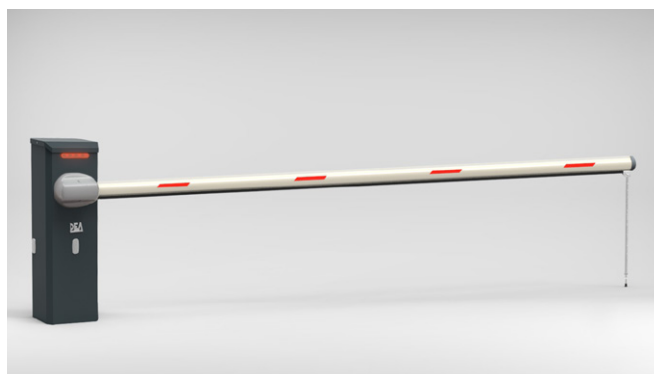


* This is a STOP/N barrier, the application on PASS/N remains unchanged

Standard support Art.1010

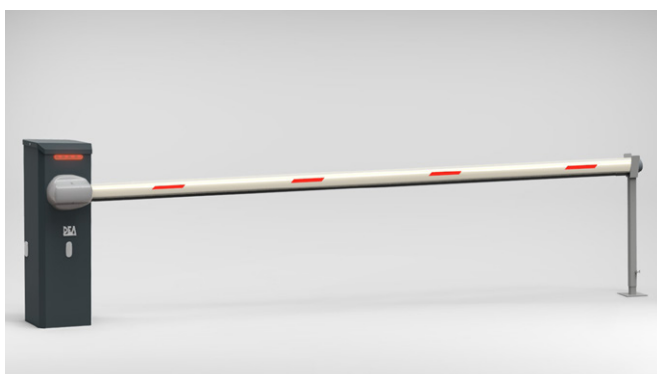


* This is a STOP/N barrier, the application on PASS/N remains unchanged

Support with electromagnetic lock Art.1010M

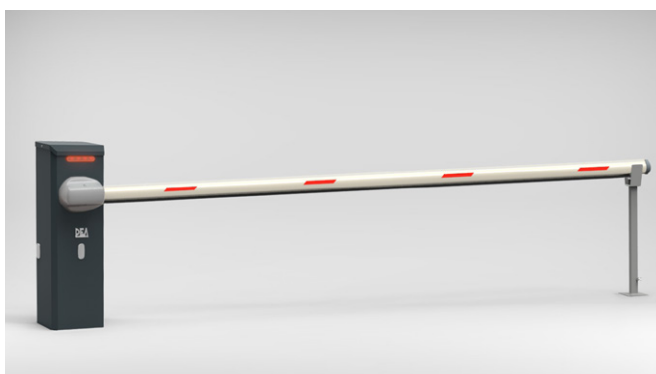

* This is a STOP/N barrier, the application on PASS/N remains unchanged


Wiring

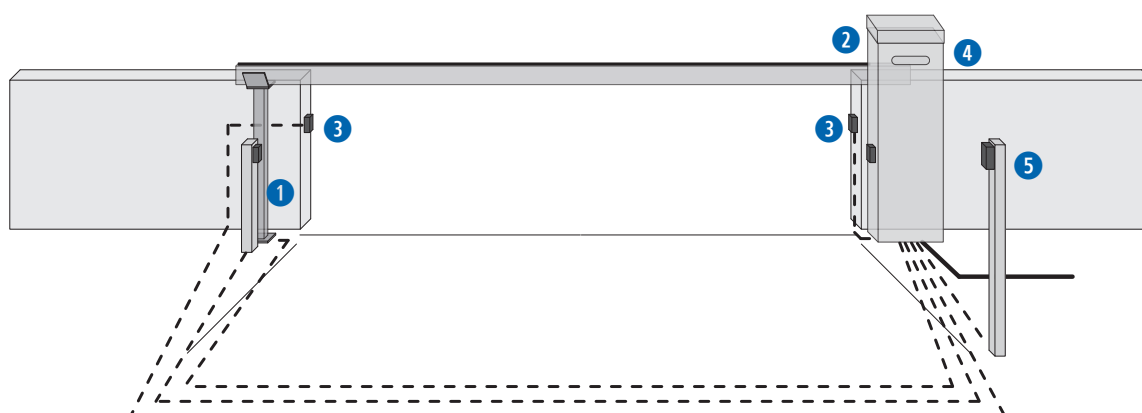

- Corrugated pipe for power supply cable
 - - - Ø20 corrugated pipe or external PVC conduit for connection between the control board and the command and safety accessories

pos.	description
1	Column with photocell
2	Barrier
3	Photocells
4	LED strip
5	Column with selector

Dimensions

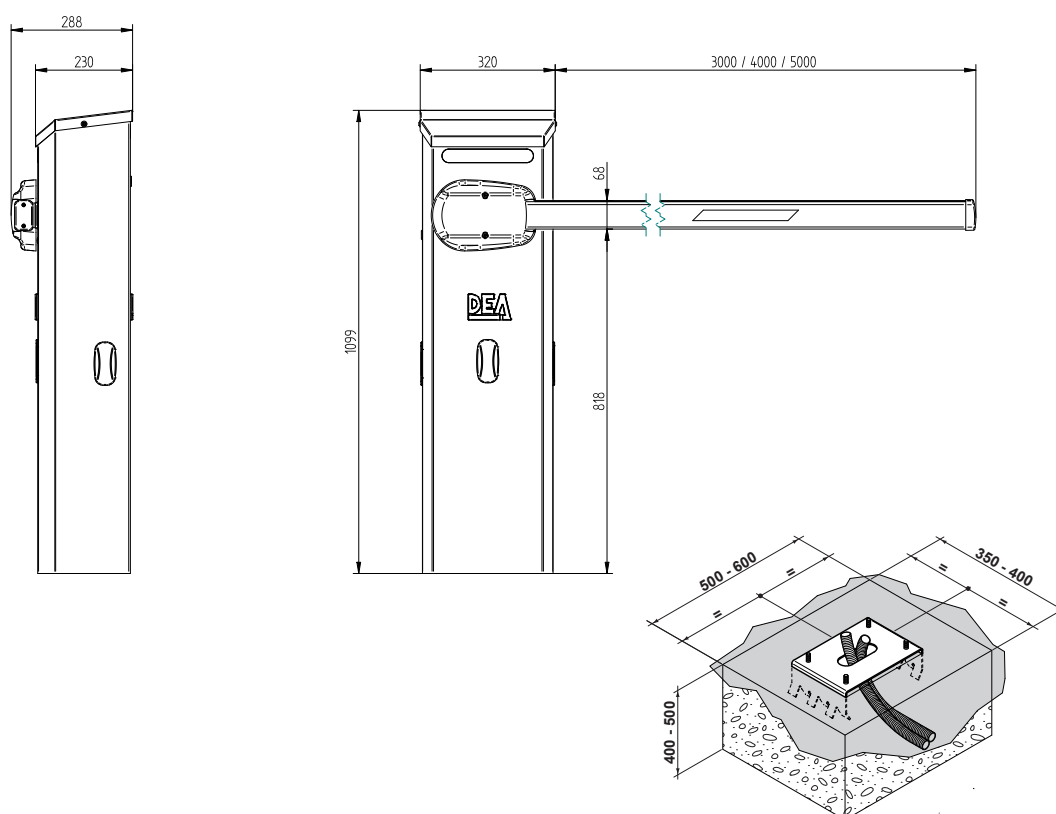

DEAuser



DEAuser is the app for **private users** that allows activation of automation at **close proximity** via Bluetooth.

By installing NET-NODE on all devices with NETLINK technology, you can control your gate through your smartphone.

To be used with:



Art.NET-NODE 2.0
Cod.677642



DEAinstaller



DEAinstaller is the App dedicated to the **professional installer** and allows Installers to program and manage DEA automations on-site in a simple and intuitive way from their smart devices.


If you use it with the NET-NODE you can:



- ✓ keep a **data backup** of all your installations
- ✓ easily adjust the **parameters** of your control boards
- ✓ update the **firmware**
- ✓ program the **maintenance**
- ✓ manage or customise the **remotes**
- ✓ read **technical manuals** or have a look at the **electrical connections**
- ✓ control the **inputs** and **output** of the control boards
- ✓ **control** the automation with the App

To be used with:




Art.NET-NODE 2.0
Cod.677642

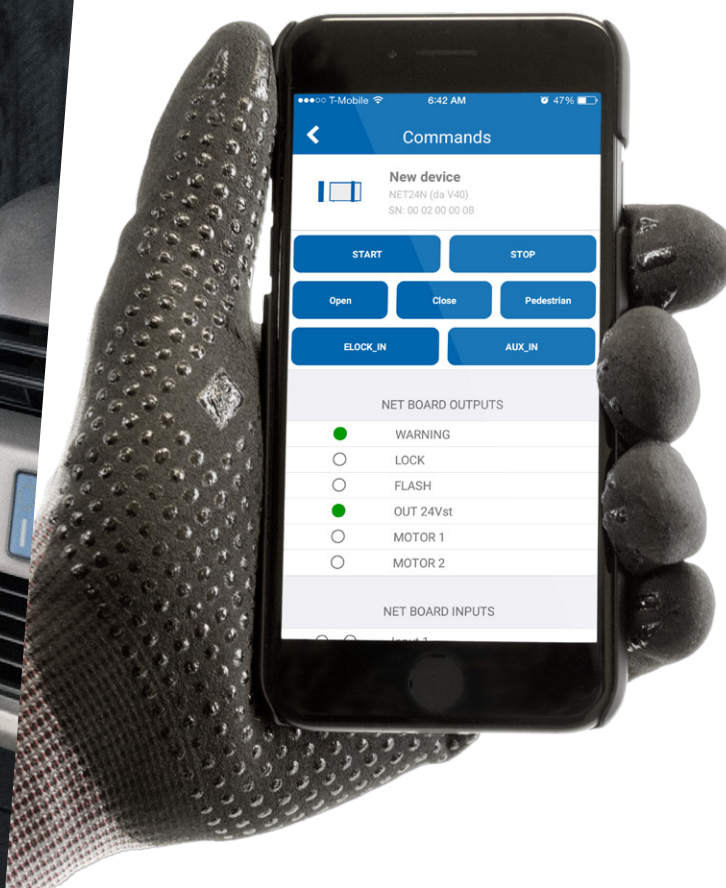



NEW



#safeasyoulike!

Non-copyable remotes!

GTI remotes are multi-function. They have three coding possibilities: DIP SWITCH, Rolling Code and D.A.R.T. the new DEA advanced coding.

You can customise the code of the remotes to guarantee the maximum security to your customer.

D. DEA

A. Advanced

R. Rolling Code

T. Transmission

Looking for **total safety**?

With **NET-BOX** each installer can customise the code of your GTI remotes.



#colourasyoulike!

Choose your favorite colour!

GTI remotes can be customised with button kits in seven colours: green, light green, blue, pink, yellow, orange and purple.




Note: button kits are supplied in packs of 5. The remote must be ordered separately.



NETLINK

is our technology applied to DEA devices for the smart management of your installations, both **locally** and **remotely**.

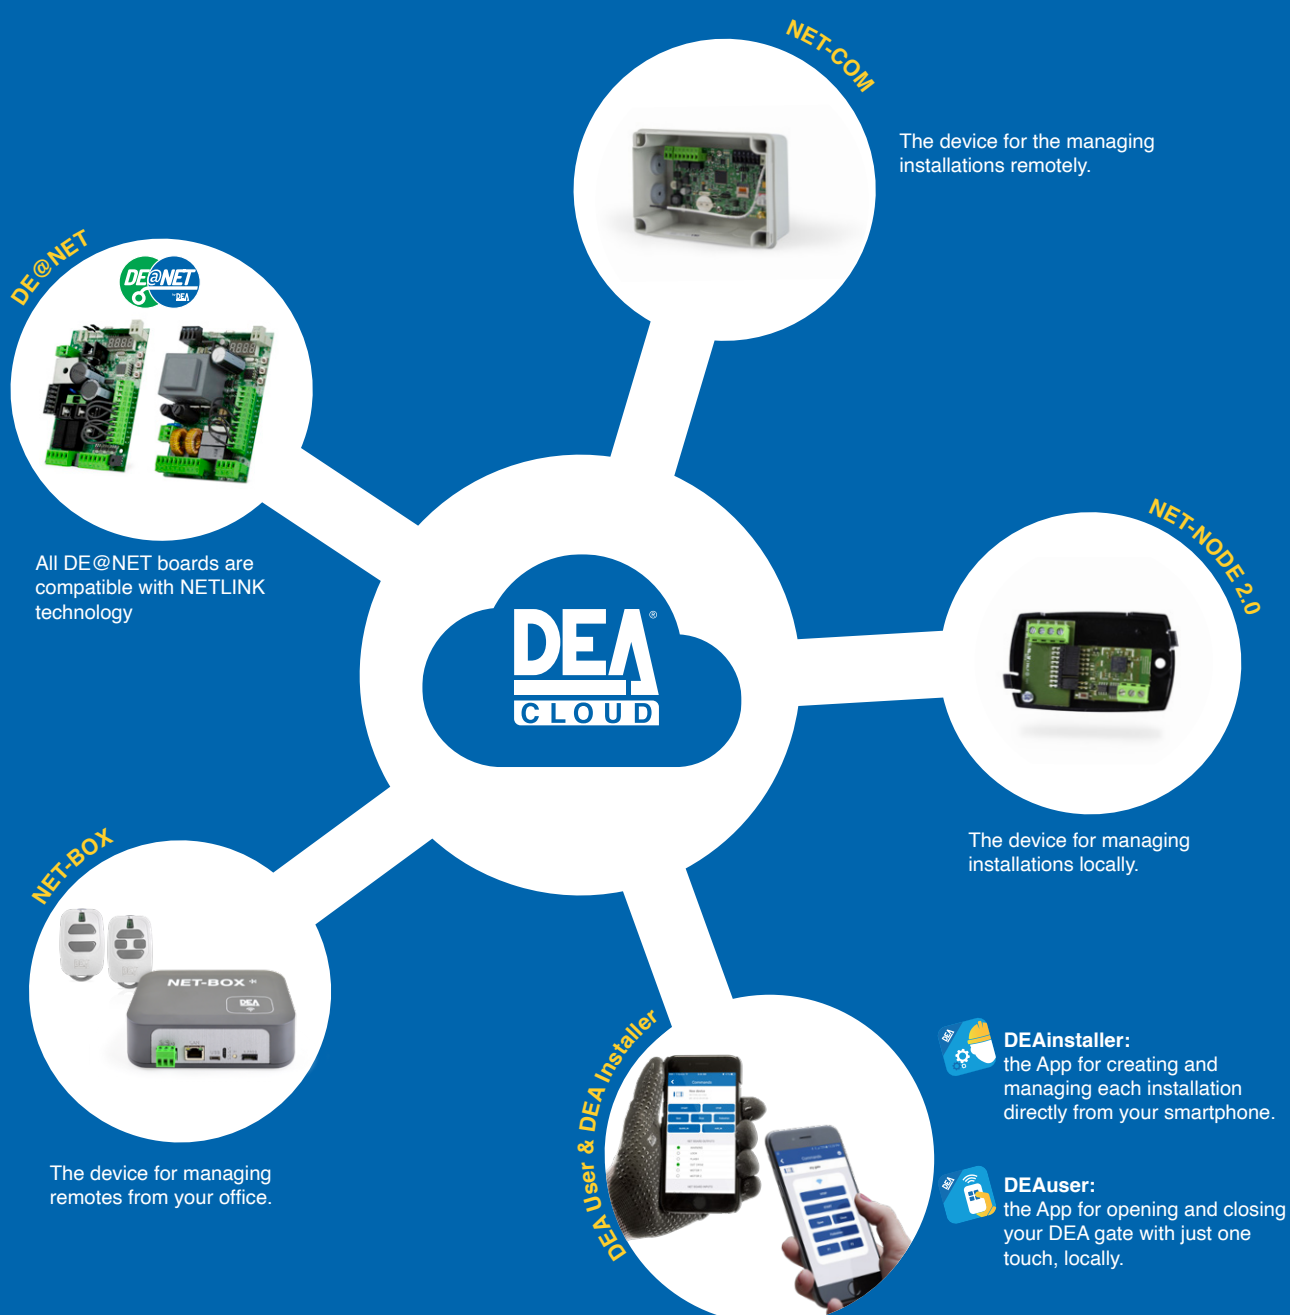

Our range

Automations for sliding gates



LIVI/N



REV




NEW



GULLIVER/N



Automations for sectional doors



SPACE/N



ADVANCE/N



LIVI 902




Automations for swing gates




MAC



STING



LOOK



GEKO



LIVI 502



GHOST 100/200



OLI/N



Automations for industrial gates



LATO



550 PL



Barriers



PASS/N



STOP/N



NEW



TRAFIK/N



Bollards



ROCK



HEADQUARTER
DEA SYSTEM S.p.A.
 Via della Tecnica, 6 - 36013 Piovene Rocchette (VI) - ITALY
 ☎ + 39.0445.55.07.89 - 📠 + 39.0445.55.02.65
 info@deasystem.com - www.deasystem.com

Branches > Italy, France, United Kingdom, Ireland, España, Portugal, Polska, Deutschland, Беларусь

> HEAD OFFICE
DEA System UK & IRE
 Sandholes Road - Cookstown - Co. Tyrone
 BT80 9AR - IRELAND
 ☎ + 44 (0)28 8676 6476 - 📠 + 44 (0)28 8676 2414
 info@deasystem.net

DEA System UK & IRE
 Unit 29-31 - The IO Centre - Hearle Way - Hatfield -
 Hertfordshire AL10 9EW - UNITED KINGDOM
 ☎ + 44 (0)1707 246 599
 contact@deasystem.net